

RWW
9000 SERIES




505 CHURCH
NASHVILLE, TN

9000 SERIES

4SSG WINDOW WALL SYSTEM

The RWW 9000 Series is a 4-sided structurally glazed unitized window system, with a 5" (127mm) structural mullion depth.


This system migrates seamlessly from exterior facade to interior set balconies as a single system. Offers a large range of custom angled inside/outside corner conditions and segmented wall options.

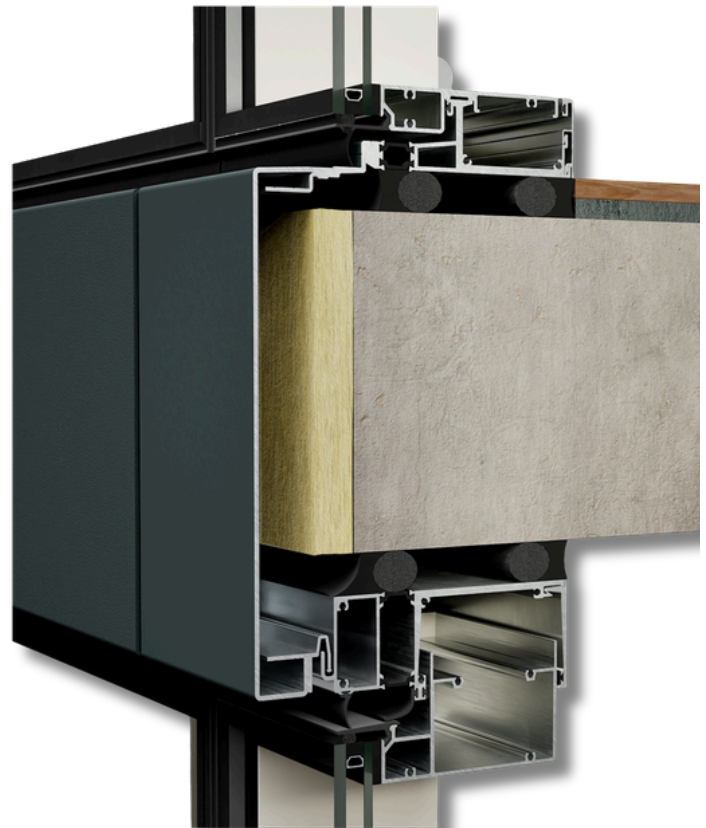

System Features


- Pressure equalized system
- Zero sight-line outswings vents
- Fully unitized shop built system
- Glass from 1" to 2" thick [26 mm to 52mm]
- Single action handle, multi-point locking system
- 1-pc extrusion slab cover options
- Full head/sill/jamb receptor system
- Exterior 2/3-coat PVDF finish, custom color
- 2.5" base sightline with available 3" sightline
- Shop fitted fully sealed/insulated back-pans
- Interior polyester powder coat finish, custom color
- Single action ADA compliant operable vents
- Integral louver and metal panel infill options
- Fixed, project-out awning casements
- 4-sided structurally glazed system
- Structural mullion depth 5"

Section Detail

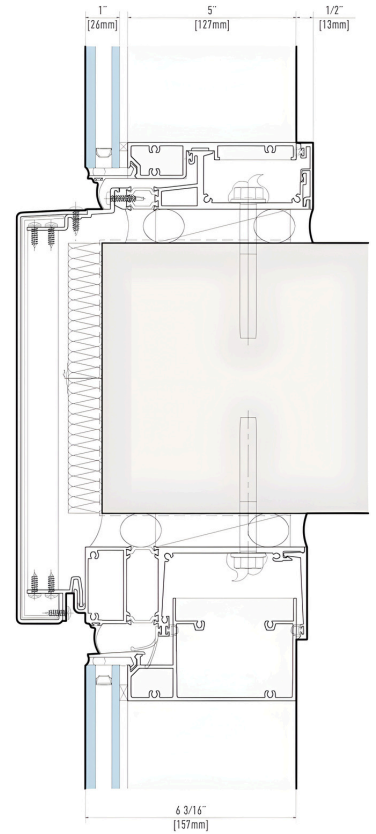

Technical Data

Operable Air Infiltration	0.10 CFM/SQ.FT. @6.24 PSF	NFRC U-Factor	0.20 - 0.45 BTU/hr.ft ² .°F
Fixed Air Infiltration	0.06 CFM/SQ.FT. @6.24 PSF	Frame Depth	5" (127mm)
Water Performance	15 PSF	Frame Sightline	2-1/2" (63.5mm) / 3" (76mm)
CRF	58 - 72	STC	31 - 45

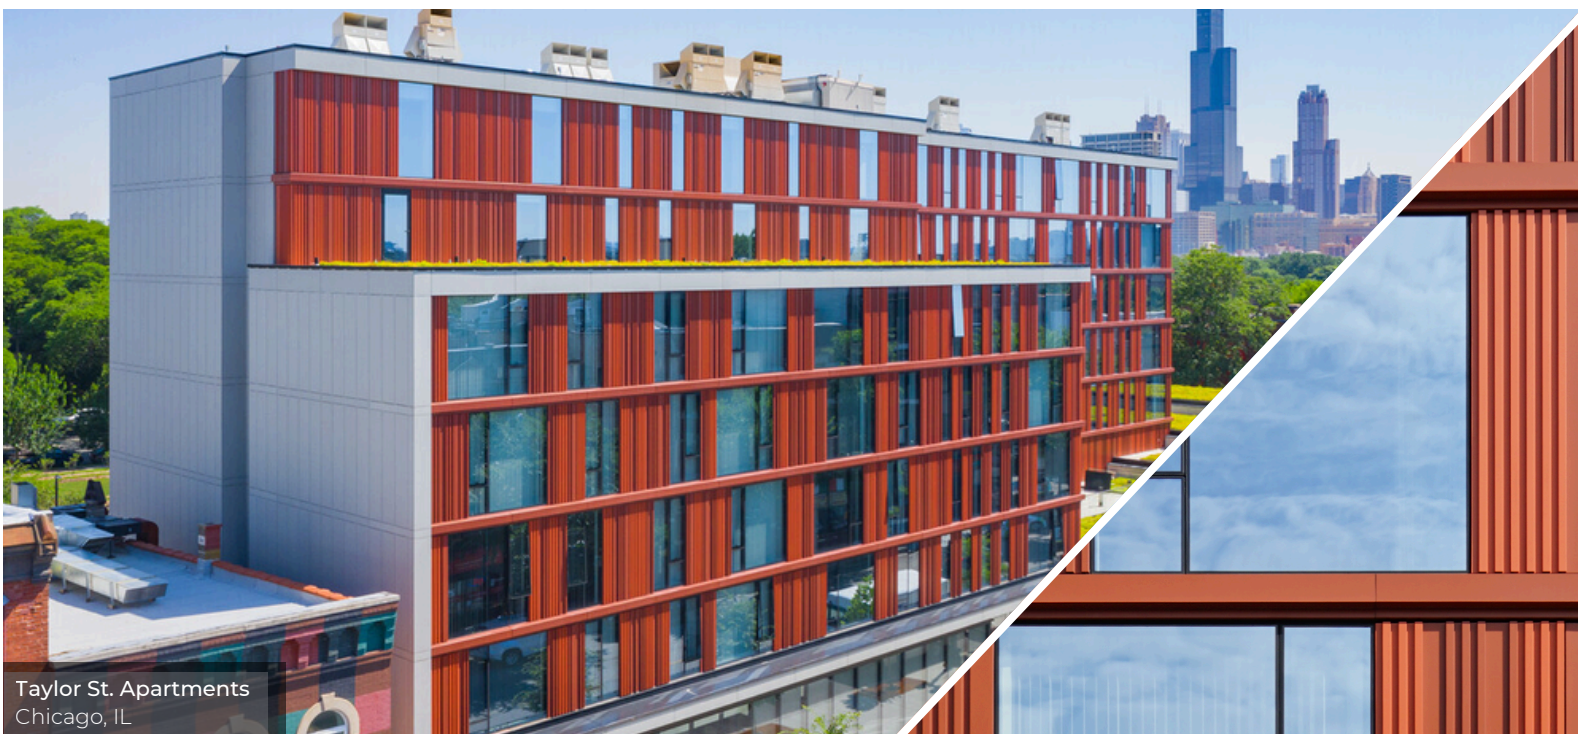

Taylor St. Apartments
Chicago, IL