

SYSTEM FEATURES

- High span capabilities, project beyond slab edge
- Structural mullion depth 7-5/8”
- 4-sided structurally glazed system
- Slab cover infill flush with exterior face of glass
- Slab cover infill IG spandrel, extrusion options
- Fully unitized shop built system
- Fixed, project-out awning, project-out casement
- Zero sight-line vents
- Single action handle, multi-point locking system
- Single action ADA compliant operable vents
- Pressure equalized system
- Interior polyester powder coat finish, custom color
- Exterior 2/3-coat PVDF finish, custom color
- 1-pc extrusion slab cover options
- Full head/sill/jamb receptor system
- Glass from 1” to 2” thick [26mm to 52mm]

RWW 9700 SERIES PROPERTIES


Allowable Air
0,10 CFM/SQ.FT. @6.24 PSF

Water infiltration
12 PSF

NFRC U-Factor
0,20-0,45 BTU/hrft²°F

CRF: 58 to 69
STC: 31 to 42

SYSTEM DETAILS

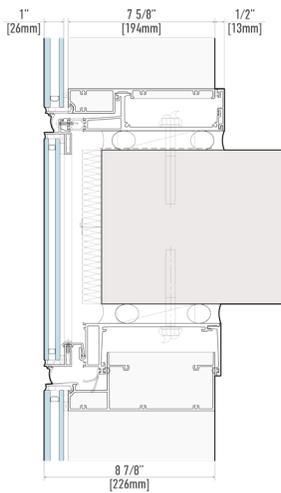

TYPICAL RWW 9700 SERIES SECTION DETAIL



RWW 9700 SERIES SECTION VIEW



EXTERIOR VIEW



EXTERIOR VIEW



EXTERIOR VIEW