

RWW
8000 SERIES



The Italic & Lumen LIC
Long Island City, NY

8000 SERIES

4SSG CURTAIN WALL SYSTEM

The RWW 8000 Curtain Wall Series is an industry overachiever with exceptional invention and parentage, derived exclusively from RWW's longstanding investment to innovation.


With in-house structural, thermal, rapid prototyping, architectural rendering, and design-assist services, RWW can deliver unparalleled service throughout the design-assist process to help bring your curtain wall project to life: on-time, on budget, and exactly as you imagined.



System Features


- Pressure equalized system
- Zero sight-line outswings vents
- Fully unitized shop built system
- Glass from 0.94" to 1.77" thick [24 mm to 45 mm]
- Single action handle, multi-point locking system
- 1-pc extrusion slab cover options
- Full head/sill/jamb receptor system
- 3" base sightline with available 3.5" sightline
- Interior polyester powder coat finish, custom color
- Single action ADA compliant operable vents
- Integral louver and metal panel infill options
- Fixed, project-out awning casements
- Exterior 2/3-coat PVDF finish, custom color
- Shop fitted fully sealed/insulated back-pans
- 4-sided structurally glazed system
- 8" base system depth with available 7", 9" and 11" depths

Section Detail

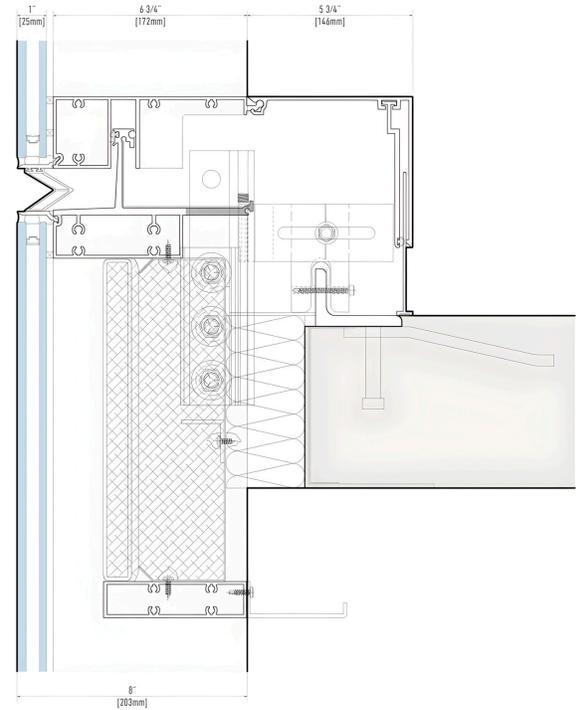

Technical Data

Operable Air Infiltration	0.10 CFM/SQ.FT. @6.24 PSF	NFRC U-Factor	0.29 - 0.46 BTU/hr.ft2.°F
Fixed Air Infiltration	0.06 CFM/SQ.FT. @6.24 PSF	Frame Depth	7", 8", 9", & 11"
Water Performance	15 PSF	Frame Sightline	3" & 3.5"
CRF	58 - 72	STC	31 - 45

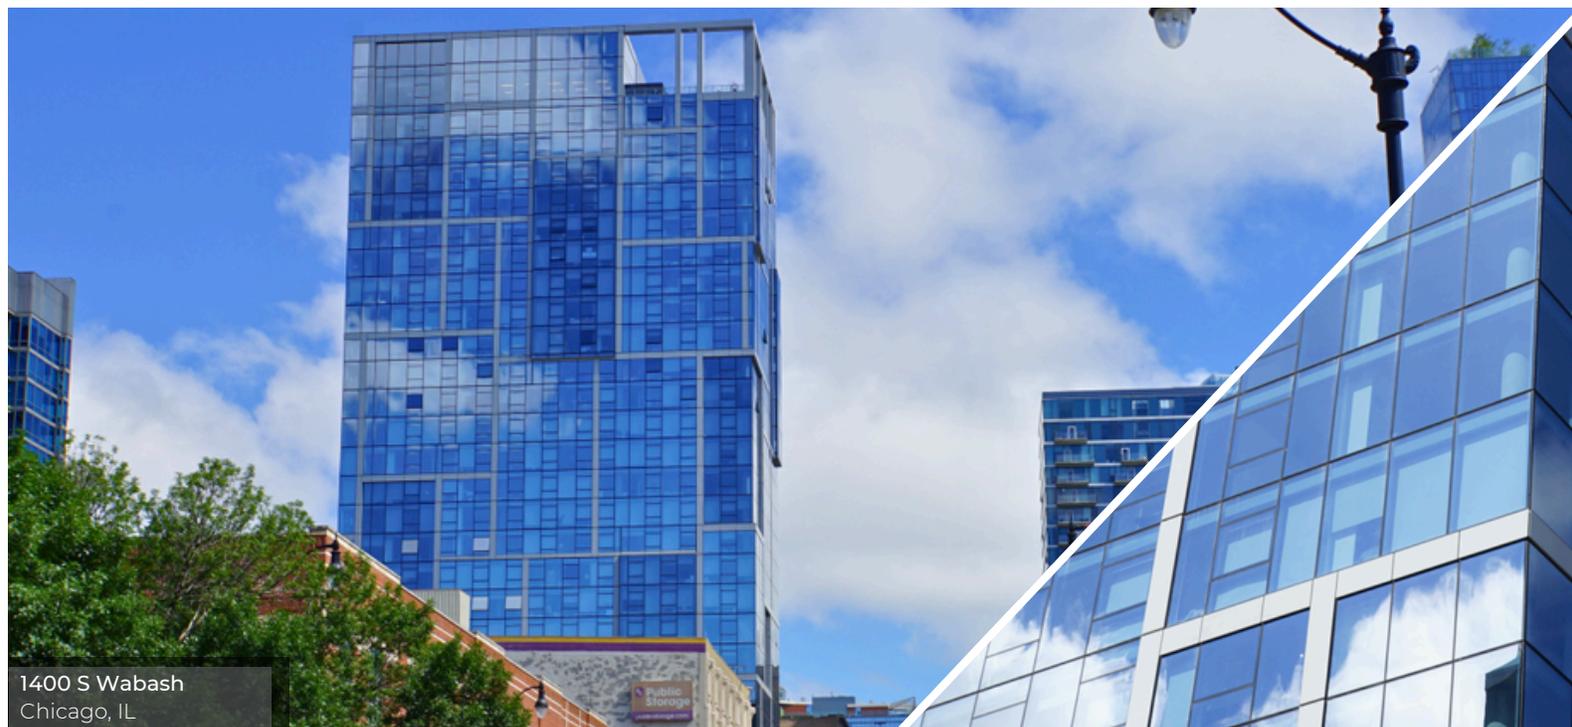

1400 S Wabash
Chicago, IL